




ISONEM MS 80

(Transparent Liquid For Exterior Surfaces)

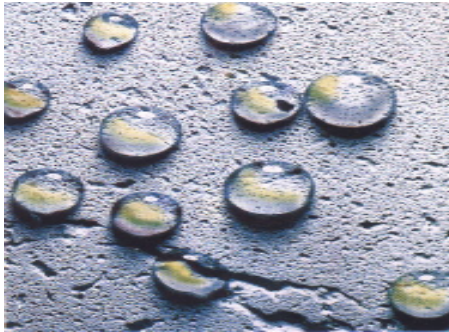


ISONEM MS 80 is a one component, transparent, penetrating silane/siloxane hydrophobic impregnant. The product reacts chemically with a mineral substrate to form a surface that is repellent to water yet still permeable to water vapour. ISONEM MS 80 protects and preserves the substrate without altering the natural surface texture or colour and without forming a film layer on the exterior surfaces where it has been applied.

Since it prevents dampness, it also avoids the loss of the heat insulation value of the buildings. Protects the building from the damages and corrosion caused by the rain. It increases the life of the buildings, and can be used as a coating underneath the painting of the exterior surfaces.



Advantages :

- Economical
- Deeply penetrating
- Permeable to vapour
- Inhibits mould growth
- Reduces unsightly staining
- One component, easy to apply
- Easily re-coated
- Protects against rain penetration
- Inhibits chloride ingress
- Reduces risk of efflorescence
- Effective on old and new surfaces
- Helps preserve natural colour and texture

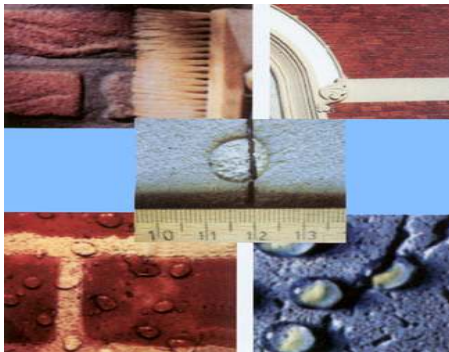

The ISONEM MS 80 molecules are very small and highly mobile. The relatively slow solvent evaporation rate allows it to enter even the smallest pores. Its water vapour permeability allows the surface to "breathe" naturally. The application of ISONEM MS 80 greatly extends the life and colour retention of brick-work.

ISONEM MS 80 be used as an additional priming coat prior to acrylic protection exterior coatings, ISONEM BE 99.

Using areas :

ISONEM MS 80 is recommended for weatherproofing exterior building brickwork, concrete, cement rendered concrete blocks, natural or cast stone etc. It is applicable on all types of mineral based and absorbing surfaces; such as, concrete, plaster, brick, compressed brick, travertine, natural stone, mosaic, tile, etc.

TECHNICAL PROPERTIES

Composition	Silane/Siloxane based hydrophobic impregnant
Density (Mixture)	0,8 gr/ml approx.
Solvents	Liquid hydrocarbons
Flash Point	App. 38 °C
Storage Temperature	App. 30 °C
Application Temperature	Below dew point
Application tools	Brush, roller or low pressure sprayer

APPLICATION :

Substrate Condition: Surfaces should be dry and free from dirt, grit, dust, grease etc. Application to wet substrate will prevent penetration and result in poor adhesion. Paints, form release agents, curing compounds, moss, laitance, algae, etc. must be removed. Allow at least one month before applying ISONEM MS 80 to new concrete or masonry surfaces. There should be no cracks wider than 0.4 mm on the surfaces where the product will be applied and the existing cracks must be repaired. Mask glass, asphalt, bitumen and oil painted surfaces. Remove splashes promptly with Mineral Turpentine.

Mixing and Priming : Not required.

Method of Use: Apply direct from container - do not dilute. Wear impervious gloves and goggles during application. Apply by brush, roller or low pressure (approx. 40-60kPa) spray equipment. Do not use atomising sprayers. Flood the surface, don't brush out like paint (causes bubbles or incomplete penetration). Apply evenly with steady strokes over the entire surface. Apply the product downwards from up. One coat is normally required if application is liberal and thorough and surface is reasonably non porous. On very porous material, it may be necessary to apply a second coat or treat porous surfaces with a cement based paint prior to application of ISONEM MS 80. When applying two coats of ISONEM MS 80, apply wet-on-wet.

Do not apply ISONEM MS 80 to concrete surfaces subject to vehicular traffic. ISONEM MS 80 is invisible once dry - take adequate precautions to ensure entire surface is covered if application is interrupted. ISONEM MS 80 is not recommended for application to below ground surfaces subject to hydrostatic pressure.

Curing

At 25°C the water repellent properties fully develop in approximately 24 hours.

CONSUMPTION : Coverage depends on absorbency and porosity of the substrate. On normal brickwork, coverage is approximately 4m² per litre. On very porous substrates, consumption may be up to 2m² per litre, on only slightly absorbent substrates it may reduce to 6m² per litre per coat. The quantity of material required for the second coat, when required, is approximately half of the quantity required for the first coat. As an estimating data; 100-300 ml/sqm approx.

PACKAGING : ISONEM MS 80 is available in 5 litre can and 20 litre pails.

STORAGE : ISONEM MS 80 can be stored in tightly sealed original pails for 12 months, if kept dry and at moderate temperatures. Store away from sources of heat or naked flames. It is important to reseal containers after use to prevent deterioration of the product by evaporation.

IMPORTANT NOTES:

ISONEM MS 80 contains flammable solvents. Ensure adequate ventilation. Do not smoke during application. Avoid the presence of a naked flame, electrical equipment or sparks. Wear and maintain suitable breathing equipment if applying by low pressure spray or working in confined areas. Keep out of reach of children. Avoid contact with skin and eyes and avoid breathing its vapour or mist spray. Wear goggles or safety glasses. In case of poisoning consult a doctor immediately.

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this ISONEM Construction Chemicals and Paint Ind. Tr. Ltd. Co. publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use

ISONEM CONSTRUCTION CHEMICALS AND PAINT IND. TR. LTD. CO.
106/9 Sokak No:6 Dokumculer Sanayi Sitesi Isikkent/Izmir 35070 TURKEY
Tel: +90 232 437 02 24 Fax: +90 232 437 01 33

www.isonem.com

isonem@isonem.com

